arXiv:1210.4501v1 [quant-ph] 16 Oct 2012

High-dimensional quantum key distribution using dispersive optics

Jacob Mower,[1] Zheshen Zhang,[2] Pierre Desjardins,[3]
Catherine Lee,[4] Jeffrey H. Shapiro,[2] and Dirk Englund[1, 3]
[1]*Department of Electrical Engineering, Columbia University, New York, NY 10027 USA*
[2]*Research Laboratory of Electronics, Massachusetts Institute of Technology, Cambridge, MA 02139 USA*
[3]*Department of Applied Physics and Applied Mathematics,*
Columbia University, New York, NY 10027 USA
[4]*Department of Physics, Columbia University, New York, NY 10027 USA*

We propose a high-dimensional quantum key distribution (QKD) protocol that employs temporal correlations of entangled photons. The security of the protocol relies on measurements by Alice and Bob in one of two conjugate bases, implemented using dispersive optics. We show that this dispersion-based approach is secure against general coherent attacks. The protocol is additionally compatible with standard fiber telecommunications channels and wavelength division multiplexers. We offer multiple implementations to enhance the transmission rate and describe a heralded qudit source that is easy to implement and enables secret-key generation at up to 100 Mbps at over 2 bits per photon.

Quantum key distribution (QKD) protocols [1] employ correlations between quantum states to establish secret keys between two parties that can subsequently be used to share secure messages. High-dimensional correlations enable the generation of multiple bits per photon (bpp) and could enable faster generation of the secret key, potentially greater robustness to noise [2], and more ideal number state statistics [3]. A range of degrees of freedom of photon pairs has been investigated for this purpose, including position-momentum [4], time [5, 6], energy-time [7, 8], and orbital angular momentum (OAM) [9, 10]. Temporal correlations are particularly appealing because they are robust during propagation through single-mode fiber and free space.

We consider a protocol in which two parties, Alice and Bob, build a secret key by measuring temporal correlations between two entangled photons. These photons are prepared by spontaneous parametric down-conversion (SPDC) in a superposition state with a lifetime given by the coherence time of the pump field, σ_{coh}, and correlated to some correlation time, σ_{cor}, determined by the phase matching bandwidth of the SPDC source. σ_{coh} can be as long as a microsecond for a standard diode laser, and σ_{cor} is on the order of hundreds of fs to several ps for typical SPDC sources [11]. While the resulting number of information eigenstates [12], given by the Schmidt number $K \approx \sigma_{\text{coh}}/\sigma_{\text{cor}} \equiv d$, can therefore be quite large [5], security ultimately limits $K \lesssim 100$ for practical scenarios. These high-dimensional correlations were employed for QKD [13], but to our knowledge, no security proof of this protocol exists. Here, we propose a high-dimensional temporal QKD protocol that is secure against general coherent attacks and relies on measurements by Alice and Bob in two conjugate bases. We show that measurements in both bases are possible using only single-photon detectors and simple dispersive optics. We call this protocol dispersive optics QKD (DO-QKD).

We first outline our QKD protocol and introduce group velocity dispersion (GVD). We then show that GVD can be used to switch between measurement bases and show that this protocol can be secure against general coherent attacks. Finally, we discuss practical implementations of the protocol in which a secret-key capacity of ~ 3 bits/photon may be achieved, with communication possible over ~ 250 km of fiber.

To start, Alice shares a clock with Bob and generates a biphoton state via SPDC. For a weak pump at frequency ω_p and operation at frequency degeneracy, the down-converted state can be approximated by

$$|\Psi_{AB}\rangle = \iint \psi(t_A, t_B) e^{i\frac{\omega_p}{2}(t_A+t_B)} |t_A t_B\rangle \, dt_A dt_B,$$

where

$$\psi(t_A,t_B)\propto e^{-(t_A-t_B)^2/4\sigma_{\rm cor}^2}e^{-(t_A+t_B)^2/16\sigma_{\rm coh}^2}, \tag{1}$$

$|t_A,t_B\rangle = \hat{a}_A^\dagger(t_A)\hat{a}_B^\dagger(t_B)\,|0\rangle$, and $\hat{a}_{A,B}^\dagger(t_j)$ denote the creation operators at time t_j for Alice and Bob, respectively.

We let Alice and Bob measure randomly in one of two conjugate bases, i.e., bases that represent time states or superpositions of those time states, as outlined in Fig. 1(a). Alice and Bob measure the arrival times of their photons, switching randomly between bases. After transmission, they publicly compare the bases of their measurements; as in BB84, they keep only those frames, during which they measured in the same basis. They build the key based on the correlated timing events [13] and use error correction and privacy amplification [14] to reduce errors and minimize an eavesdropper Eve's information.

To measure superpositions of time states, the authors in Ref. [7] considered spectral measurements. However, spectral measurements require at least as many detectors as spectral channels, increasing system cost and noise due to dark counts. We propose to use dispersive elements to transform between measurement bases.

We consider second-order dispersion (SOD), which is characterized by the parameter $\beta_2 = \partial^2/\partial\omega^2(n_{\rm eff}\omega/c)$, where $n_{\rm eff}$ is the effective index of the mode, ω is the mode frequency, and c is the speed of light in vacuum. A second-order dispersive element imparts a phase on each frequency state $\phi \propto \beta_2\omega^2$ [15]. Physically, β_2 is proportional to the linear change in the group velocity as a function of frequency. The SOD operator is unitary and its frequency domain representation, $\hat{\Delta}$ is diagonal. We call the time domain representation $\hat{U}$.

Classically, a transform-limited pulse is spread in a dispersive medium as its frequency components move out of phase. However, it was shown that if photons of $|\Psi_{AB}\rangle$ are sent through dispersive media, in the limit of large $\sigma_{\rm coh}$, $\sigma_{\rm cor}$ becomes

$$\sigma_{\rm cor}'^2 \approx \frac{\sigma_{\rm cor}^4 + (\beta_{2A}L_A+\beta_{2B}L_B)^2}{\sigma_{\rm cor}^2}, \tag{2}$$

where β_{2A} (β_{2B}) is the GVD introduced by Alice (Bob) over length L_A (L_B) [16]. Suppose $L_A = L_B = L$ and $\beta_{\rm tot} = \beta_{2A} + \beta_{2B}$. As $\beta_{\rm tot}$ increases, the temporal correlation between Alice's and Bob's photon decreases. However, $\sigma'_{\rm cor} = \sigma_{\rm cor}$ if $\beta_{2A} = -\beta_{2B} = \beta_2$, which requires that, to a global phase, $\hat{\Delta}_A = \int e^{-i\frac{1}{2}\beta_{2A}L\omega_o^2}\,|\omega_o\rangle\,\langle\omega_o|\,d\omega_o = \hat{\Delta}_B^\dagger$, where ω_o is the frequency detuning from the center frequency of the biphoton pulse, and $|\omega_o\rangle$ denotes a single photon at frequency $\omega_p/2+\omega_o$. Therefore if Alice applies normal dispersion, $\hat{U}_A$, on her photon, Bob can apply anomalous dispersion, $\hat{U}_B = \hat{U}_A^\dagger$, on his photon to recover the temporal correlations between their photons.

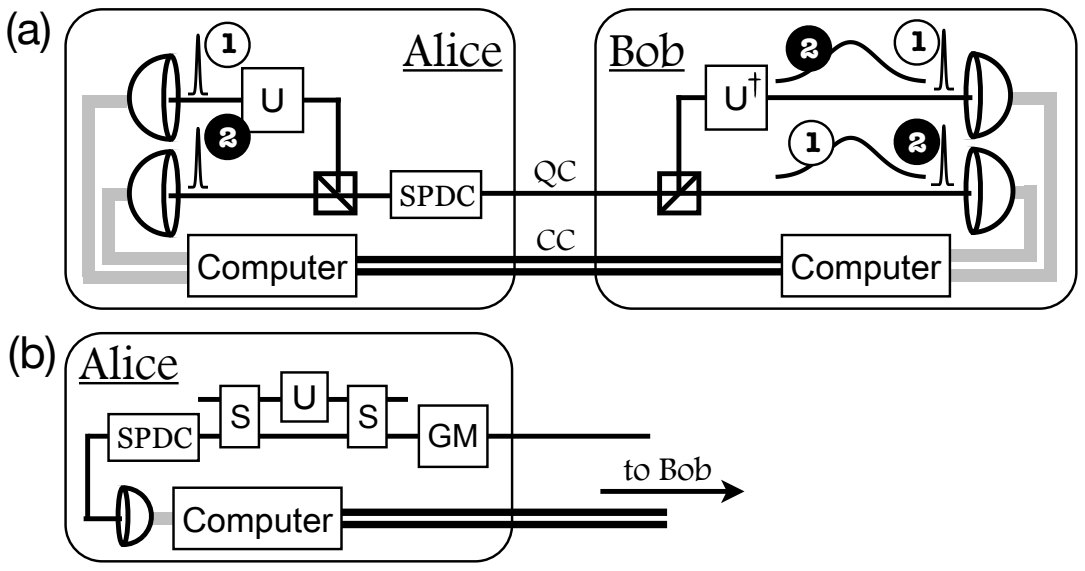

FIG. 1: (a) Alice and Bob measure in either the time or dispersed-time basis. In case (1), Alice measures in the dispersed-time basis and projects Bob's photon onto a dispersed state. In case (2), she projects Bob's photon onto an undispersed state. They only obtain correlated results if they measure in the same basis. QC represents quantum communication and CC represents classical communication. (b) An equivalent prepare-and-measure scheme. Alice uses the arrival time of her photon as a sync time sent to Bob. She then chooses with an active switch (S) whether or not to apply dispersion and modulates the delay on Bob's photon using a Gaussian modulator (GM) composed of a variable delay driven by a Gaussian-distributed random number generator.

To verify the security of the DO-QKD protocol, we calculate the secret-key capacity [17, 18]

$$\Delta I = \beta I(A,B) - \chi(A,E), \tag{3}$$

where β is the reconciliation efficiency, $I(A,B)$ is the mutual information between Alice and Bob and $\chi(A,E)$ is Eve's Holevo information about Alice's transmission [19]. We use the covariance matrix Γ, which is given by the expectation values of the anti-commutators of the measurement operators used in our protocol [26]. Since the SPDC output state is Gaussian, whose low-flux limit is given in Eq. 1, Gaussian attacks are optimal collective attacks for a measured covariance matrix [18, 21]. Additionally, Renner *et al.* showed that security against collective attacks implies asymptotic security against the most general attacks [22]. We therefore calculate the secret-key capacity using Γ and assume Gaussian attacks to establish an upper bound on Eve's information given general coherent attacks.

In our protocol, the arrival-time measurement operators are $\hat{T}_i = \int t_i \left|t_i\right\rangle \left\langle t_i\right| dt_i$, and the dispersed arrival-time measurement operators are $\hat{D}_i = \frac{1}{\beta_{2i} L} \hat{U}_i^\dagger \hat{T}_i \hat{U}_i$, where $i \in \{A, B\}$ and $[\hat{T}_A, \hat{D}_A] = [\hat{T}_B, \hat{D}_B] = i$. The covariance matrix can be written as

$$\Gamma = \begin{pmatrix} \gamma_{AA} & \gamma_{AB} \\ \gamma_{BA} & \gamma_{BB} \end{pmatrix} \tag{4}$$

where, for example, matrix γ_{BA} describes the covariance between the measurements of Bob and Alice [20]. In the absence of excess noise,

$$\begin{aligned} \gamma_{AA} &= \begin{pmatrix} \frac{u+v}{16} & -\frac{u+v}{8k} \\ -\frac{u+v}{8k} & \frac{(u+v)(4k^2+uv)}{4k^2uv} \end{pmatrix} \\ \gamma_{AB} &= \gamma_{BA}^T = \begin{pmatrix} \frac{u-v}{16} & \frac{u-v}{8k} \\ -\frac{u-v}{8k} & -\frac{(u-v)(4k^2+uv)}{4k^2uv} \end{pmatrix} \\ \gamma_{BB} &= \begin{pmatrix} \frac{u+v}{16} & \frac{u+v}{8k} \\ \frac{u+v}{8k} & \frac{(u+v)(4k^2+uv)}{4k^2uv} \end{pmatrix} \end{aligned} \tag{5}$$

where $u = 16\sigma_{\text{coh}}^2$, $v = 4\sigma_{\text{cor}}^2$ and $k = 2\beta_2 L$. Note that for large dispersion, the covariance matrix converges to that for frequency and arrival-time measurements. We require that the bases be conjugate to use the covariance matrix approach, which requires that $\beta_2 L \gg \sigma_{\text{coh}}\sigma_{\text{cor}}$. However allowing for finite σ_{coh} in the case of $\beta_{2A} = -\beta_{2B}$, σ_{cor}^2 and σ_{coh}^2 become $\sigma_{\text{cor}}''^2 = \sigma_{\text{cor}}^2 + (\beta_2 L/\sigma_{\text{coh}})^2$ and $\sigma_{\text{coh}}''^2 = \sigma_{\text{coh}}^2 + (\beta_2 L/\sigma_{\text{cor}})^2$, respectively. In this limit, σ_{coh}'' (σ_{cor}'') is significantly larger than σ_{coh} (σ_{cor}), increasing the time spent acquiring correlations in the dispersed basis. However, the effect of this on the data rate could be made negligibly small using asymmetric basis selection [23] or using heralding as described below.

Following the methods employed continuous variable QKD (CV-QKD) protocols, we account for excess noise ϵ and loss of correlations η due to either Eve or the transmission channel. The covariance matrix becomes

$$\Gamma_n = \begin{pmatrix} \gamma_{AA} & (1-\eta)\gamma_{AB} \\ (1-\eta)\gamma_{BA} & (1+\epsilon)\gamma_{BB} \end{pmatrix}. \tag{6}$$

Alice's auto-covariance matrix does not depend on ϵ and η because her setup is not accessible to Eve. The Holevo information can be calculated from the symplectic eigenvalues of Γ_n [24–26], which we detail in the Supplemental Information. We then calculate $I(A,B)$ from the time and dispersed-time correlation coefficients, using $\hat{T}'$ and $\hat{D}'$ to include noise due to jitter and dark counts, pessimistically taken as Gaussian distributed random variables. We thereby calculate ΔI given a lower bound on $I(A,B)$ and an upper bound on $\chi(A,E)$, plotting the results in Fig. 2 using the parameters shown in the plot and caption. Even with general coherent attacks, Alice and Bob can still share a large amount of information per second using DO-QKD. We take $\epsilon = \eta = 0.1\%$ defined for all d with respect to $d = 64$. This ϵ corresponds to an increase in the standard deviation of Bob's auto-covariance elements, and η relates to a decrease in the standard deviation of Alice and Bob's joint covariance elements, both by roughly 1 ps. The maximum transmission length shown, ~ 250 km, is significantly longer than for CV-QKD protocols [**?**], which are generally limited to < 25 km transmission. The primary reason for this difference is that Eve cannot obtain more signal photons from Alice than Bob. As a result, ϵ and η in our protocol does not increase with loss – ΔI decreases to zero only when the probability of registering a dark count approaches the probability of Bob detecting a photon. The bit rate in our protocol can also be significantly higher.

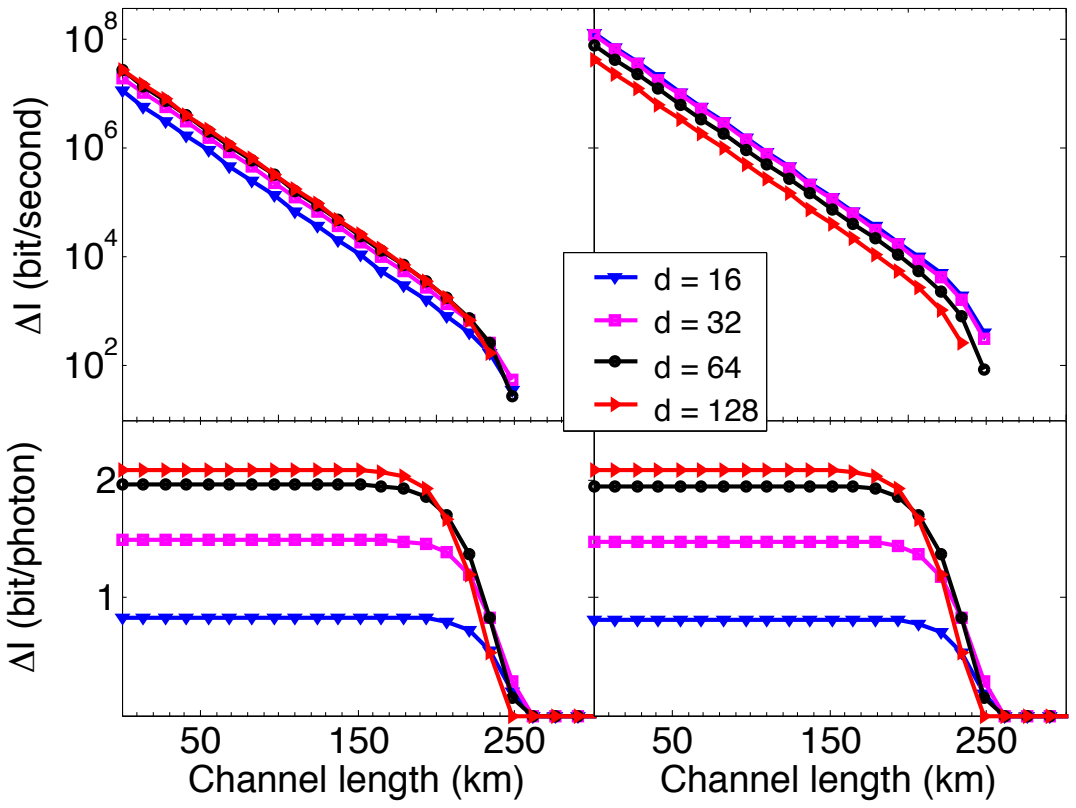

FIG. 2: (left) Secret-key capacity as a function of channel length assuming a constant photon emission rate for all coherence times; $\sigma_{\rm cor} = 30$ ps; propagation loss $\alpha = 0.2$ dB/km; detector timing jitter $J = 20$ ps; Alice and Bob system detection efficiencies of 50%; $\epsilon = \eta = 0.1\%$; probability of dark counts per frame, $P_D = 10^{-6}$; $\beta = 0.9$; pair generation rate $\gamma_\nu = 1/3$ GHz; expected number of pairs per frame assuming heralding, $\bar{n} = 0.6$. (right) The secret-key capacity given the same parameters, but with $\gamma_\nu = \bar{n}/(d \cdot \sigma_{\rm cor})$. The upper plots show bits per second, and the lower plots show bit per photon, i.e., bits per frame in which Alice and Bob measure in the same basis.

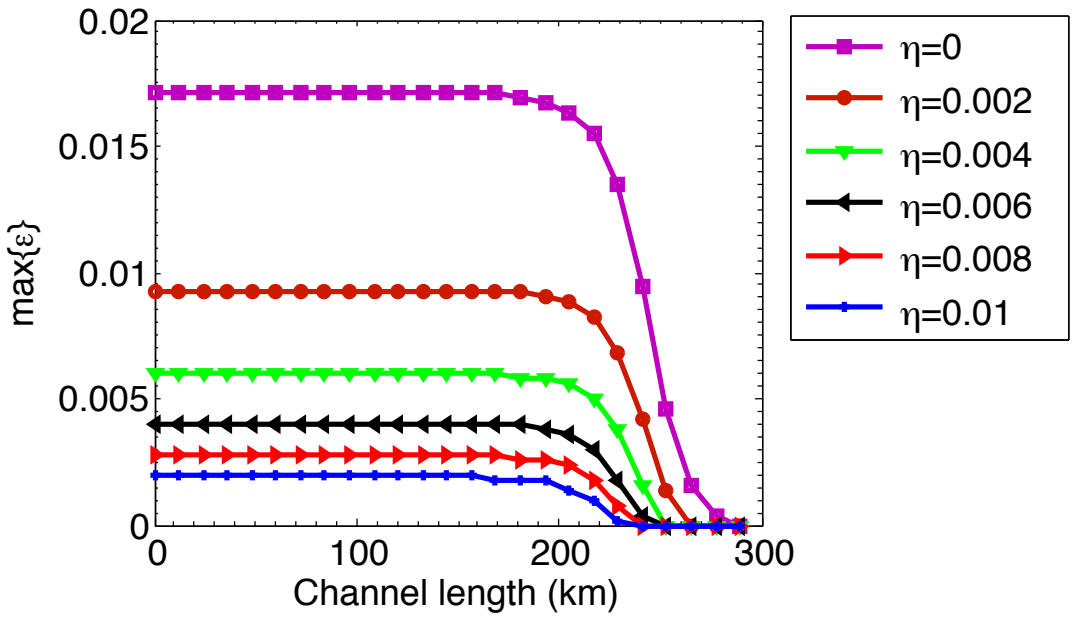

FIG. 3: Maximum excess noise ϵ such that $\Delta I > 0$, using the parameters listed in the Fig. 2 caption, and $d = 16$.

While we have considered photons generated by SPDC, it may not be possible to experimentally determine the covariance matrix elements for such a state, as Alice and Bob have no knowledge as to the center time of the biphoton envelope. Therefore, Alice and Bob could use a prepare-and-measure scheme, shown in Fig. 1(b). In this realization, Alice directly measures the arrival time of her photon, sends this time to Bob as a synchronization pulse, and then modulates the delay on Bob's photon to encode information.

In addition to enabling measurement of the covariance matrix, this technique allows Alice to increase the photon generation rate. With high system detection efficiency, she can determine whether multiple pairs are emitted in each frame and remove them with an amplitude modulator. Therefore, using this heralding and post-selection, Alice can send on the order of one photon per frame, while the probability of producing multiple photons can be strongly suppressed. Multiphoton events increase the error rate in the presence of loss, reducing $I(A, B)$.

Compared to protocols employing conjugate bases in position-momentum [4] and energy-time [7, 8], our time-bin protocol requires fewer detectors – as few as one detector per party if the beam-splitters are replaced with active switches, as shown in Fig. 1(b). For data rates exceeding that allowed by detector dead-time, one must use a detector array, however the number of detectors in this array does not scale with the dimension of the protocol. This lower number of detectors can increase resilience to attack due to a lower dark count probability. Alternatively, Alice could use an attenuated laser source for the protocol, applying or not applying dispersion to the pulse sent to Bob. This could be paired with a decoy state protocol to enhance the secure transmission length [27].

The DO-QKD protocol is ideally suited for implementation in fiber telecommunications networks and photonic integrated circuits, which are designed for multiplexed, high bitrate signals. Alice could use a commercial fiber Bragg grating, silicon photonic crystal waveguide [28], or optical cavity [29]. For channel bandwidths of $\sim 1/\sigma_{\rm cor}$, DO-QKD can operate at the Heisenberg measurement limit, while for larger bandwidths, dense wavelength division multiplexing (DWDM) could be implemented to run hundreds of independent wavelength channels simultaneously.

This work was supported by the DARPA Information in a Photon program, through grant W911NF-10-1-0416 from the Army Research Office, by the Sloan Research Fellowship, and the Columbia Optics and Quantum Electronics IGERT under NSF grant DGE-1069420

[1] C. Bennett and G. Brassard, in *Proceedings of IEEE International Conference on Computers, Systems, and Signal Processing* (IEEE, New York, 1984), pp. 175–179.

[2] N. J. Cerf, M. Bourennane, A. Karlsson, and N. Gisin, Phys. Rev. Lett. **88**, 127902 (2002).

[3] T. Horikiri, Y. Takeno, A. Yabushita, and T. Kobayashi, Phys. Rev. A **76**, 012306 (2007).

[4] L. Zhang, C. Silberhorn, and I. A. Walmsley, Phys. Rev. Lett. **100**, 110504 (2008).

[5] I. Ali Khan and J. C. Howell, Phys. Rev. A **73**, 031801 (2006).

[6] H. Bechmann-Pasquinucci and W. Tittel, Phys. Rev. A **61**, 062308 (2000).

[7] B. Qi, Opt. Lett. **31**, 2795 (2006).

[8] J. Mower, F. Wong, J. Shapiro, and D. Englund, arxiv:1110.4867 [quant-ph].

[9] A. Vaziri, G. Weihs, and A. Zeilinger, Phys. Rev. Lett. **89**, 240401 (2002).

[10] A. Mair, A. Vaziri, G. Weihs, and A. Zeilinger, Nature **412**, 313 (2001).

[11] T. Zhong, F. N. Wong, T. D. Roberts, and P. Battle, Opt. Express **17**, 12019 (2009).

[12] C. K. Law and J. H. Eberly, Phys. Rev. Lett. **92**, 127903 (2004).

[13] I. Ali-Khan, C. J. Broadbent, and J. C. Howell, Phys. Rev. Lett. **98**, 060503 (2007).

[14] D. Deutsch, A. Ekert, R. Jozsa, C. Macchiavello, S. Popescu, and A. Sanpera, Phys. Rev. Lett. **77**, 2818 (1996).

[15] J. R. M. Osgood, N. C. Panoiu, J. I. Dadap, X. Liu, X. Chen, I.-W. Hsieh, E. Dulkeith, W. M. Green, and Y. A. Vlasov, Adv. Opt. Photon. **1**, 162 (2009).

[16] J. D. Franson, Phys. Rev. A **45**, 3126 (1992).

[17] I. Devetak and A. Winter, Proceedings of the Royal Society A: Mathematical, Physical and Engineering Science **461**, 207 (2005).

[18] R. García-Patrón and N. J. Cerf, Phys. Rev. Lett. **97**, 190503 (2006).

[19] A. Holevo, Probl. Peredachi Inf. **9**, 3 (1973).

[20] A. Holevo, Information Theory, IEEE Transactions on **21**, 533 (1975).

[21] M. Navascués, F. Grosshans, and A. Acín, Phys. Rev. Lett. **97**, 190502 (2006).

[22] M. Christandl, R. König, and R. Renner, Phys. Rev. Lett. **102**, 020504 (2009).

[23] H.-K. Lo, H. Chau, and M. Ardehali, Journal of Cryptology **18**, 133 (2005).

[24] A. S. Holevo, M. Sohma, and O. Hirota, Phys. Rev. A **59**, 1820 (1999).

[25] A. Serafini, F. Illuminati, and S. D. Siena, Journal of Physics B: Atomic, Molecular and Optical Physics **37**, L21 (2004).

[26] C. Weedbrook, S. Pirandola, R. García-Patrón, N. J. Cerf, T. C. Ralph, J. H. Shapiro, and S. Lloyd, Rev. Mod. Phys. **84**, 621 (2012).

[27] H.-K. Lo, X. Ma, and K. Chen, Phys. Rev. Lett. **94**, 230504 (2005).

[28] S. Assefa and Y. A. Vlasov, Opt. Express **15**, 17562 (2007).

[29] C. Madsen, G. Lenz, A. Bruce, M. Cappuzzo, L. Gomez, and R. Scotti, Photonics Technology Letters, IEEE **11**, 1623 (1999).